AQUARIUM PROTEIN SKIMMER WITH 300GPH PUMP

Users' manual

Model No. 23PUM003-1802

Catalog

I. Introduction and Operating Principle:..... 1

A. Introduction:.....1
B. Operating Principle:.....1

II. 1802 Features & Specification:.....1

A. Features:.....1
B. Specification:.....2
C. Package includes:.....2

III. Parts Diagram.....2

IV. Installation:..... 2

A. Assemble:.....2
B. Positioning:.....3

V. Optimum Performance:.....4

VI. Maintenance:..... 4

Water pump maintenance:.....4
1802 skimmer maintenance:.....4

VII. Trouble shooting:.....5

I. Introduction and Operating Principle:

A. Introduction:

1802 aquarium protein skimmer removes the proteins and other organic wastes from the aquarium before they have a chance to break down into more harmful elements, such as ammonia and nitrite. Removing these wastes also helps prevent algae build-up, as does the reduction in phosphates. Protein skimmers are also helpful in removing any toxins released from corals or invertebrates in the aquarium. As a result of these effects, the water quality is therefore improved, and less frequent water changes are necessary. Protein skimmers have an added advantage in increasing the amount of oxygen in the water. Many saltwater aquariums could benefit greatly from having a skimmer.

B. Operating Principle:

A protein skimmer works by creating tiny bubbles in a collection chamber. Organic waste materials adhere to these bubbles through a chemical process called adsorption. The bubbles propel the waste materials up to the surface of the collection chamber, where dissolved protein and other contaminants are physically removed from the water column and contained in the collection cup.

By generating millions of air bubbles, protein skimmers also replenish oxygen levels in the entire aquarium. Elevated oxygen levels and proper gas exchange help maintain a stable pH by counteracting the pH-lowering effects of carbon dioxide that can occur at night.

Benefits of Protein Skimming :

- ✓ Remove organic wastes
- ✓ Decrease algae build-up
- ✓ Lower phosphates
- ✓ Remove toxins
- ✓ Reduce water changes
- ✓ Improve water quality
- ✓ Increase oxygen levels

II. 1802 Features & Specification:

A. Features:

- ✓ Totally submersible pump
- ✓ Oil-free motor
- ✓ Quiet operation
- ✓ Completely self-contained
- ✓ Triple venturi to create thousands of micro bubbles a minute
- ✓ Collection cup detachable for frequent cleaning and maintenance
- ✓ Suction cups with oscula on pump
- ✓ Designed to hang on the back of the aquarium (hanger width: 1 1/2 ")

B. Specification:

- ✓ Flux: 300 GPH
- ✓ Power: 23 W
- ✓ Voltage: 110V/60Hz
- ✓ Fits tank: 40 - 80 gal capacity

C. Package includes:

- ✓ 1 x 300 GPH Pump
- ✓ 1 x Skimmer
- ✓ 1 Filter foam
- ✓ 1 x Air hoses

III. Parts Diagram

1. Collection cup lid
2. Collection cup
3. Air hose bracket
4. J-shaped inlet tube
5. Hanger
6. Air hose
7. Filter foam
8. Water pump
9. Connecting tube
10. Reaction chamber
11. Outflow

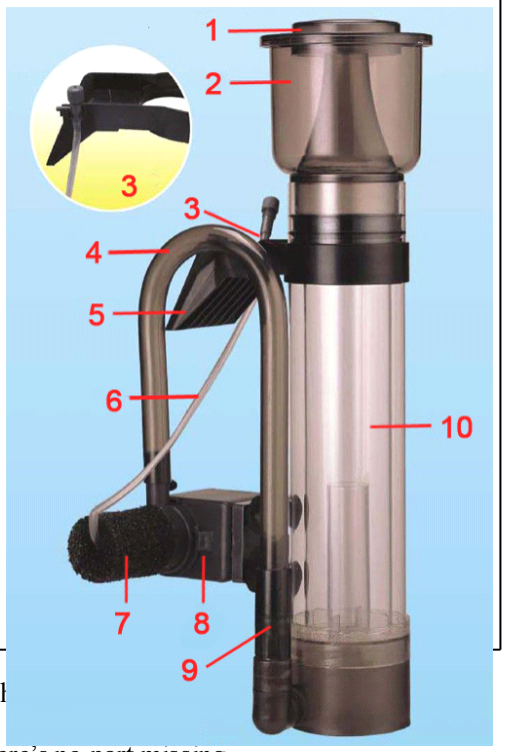

IV. Installation:

A. Assemble:

1. To start, take t` th
2. Check the parts of skimmer, make sure there's no part missing.
3. Study the parts diagram above and be ready to assemble the skimmer.
4. Put the O-ring to the bottom of collection cup (2).
5. Take the reaction chamber (9) out and put the collection cup (2) onto the top of it.
6. Cover collection cup (2) with the collection cup lid (1) tightly.

7. Join the connecting tube (9) and j-shaped inlet tube (4) together. Connect the whole tube to the bottom tube of reaction chamber.
8. Take out the water pump (8); attach the small air hose (6) to the inlet of water pump (8).
9. Attach filter foam (7) to the inlet of water pump (8). You could thread the air hose into filter foam slowly, and place the foam to the end of pump.
10. Connect the complete water pump to the end of j-shaped inlet tube.
11. Put the air hose head into air hose bracket (3) firmly. See the picture on the right.

12. Make sure that all the connection is secured.
13. Check the collection cup to see if it is pushed firmly onto the top of the chamber. The cup lid covers it firmly.

B. Positioning:

1802 skimmer is designed to be hung on the tank.

1) Hang the skimmer on the tank steadily. (hanger width: 1 1/2")
2) Adjust the hanger to the right position in order to put the pump to the proper place in the tank.
3) Suck the pump inside the aquarium steadily.
4) Adjust the skimmer and the pump to the optimum position.

Please note:

- Always keep the air hose head above the water.
- Keep the water pump under the water entirely; running dry may cause permanent damage to the pump and to your tank.

- This skimmer is designed to be used with 300 GPH flux water pump. If used with a water pump of more than 300 GPH flux, it will cause leaking.

V. Optimum Performance:

As a new protein skimmer, 1802 requires a break-in period of about 1-2 weeks before it reaches optimum performance. During this time, you will make adjustments to optimize the air-water mix.

VI. Maintenance:

Without a properly functioning protein skimmer, your aquarium could suffer from a loss of water quality due to a buildup of waste products such as ammonia and nitrate. These added pollutants will make the aquarium's filtration system less effective and will compromise water quality and inhabitant health.

Water pump maintenance:

A. Unplug the power cord

Unplug the power cord before servicing the unit.

B. Detach the water pump from the skimmer.

C. Clean the filter foam

Take the filter foam off from the pump and clean it weekly, or whenever it becomes dirty or clogged.

D. Clean the tube

Clean the tube under running water. You could use a cotton swab or something soft in the ends to clean it. Do not use soap or detergent.

E. Reassemble the pump

1802 skimmer maintenance:

A. Check the collection chamber:

Make sure the skimmer is properly pushing the waste materials, called skimmate, to the top. The collection chamber should be foaming with bubbles, which trap organic waste generated by your aquarium inhabitants through a process called adsorption.

The neck of the collection chamber should be cleaned 1-2 times a week to avoid a buildup of organic matter on the sides. This buildup can act as a wax inside the chamber, inhibiting the bubbles from pushing the organic waste into the collection cup. The collection cup itself should be washed out 1-2 times a week as well to keep the cup from collecting an excess deposit of waste residue and to avoid trapping a very fishy and unpleasant odor inside.

Note: Clean collection cup and tube with clear, fresh water only - never use soap or cleansers of any kind.

B. Clean the pipe and tubes:

Disassemble the inlet pipe and clean it with a cotton swab or something soft in the ends, and clear air tubes with clean water.

C. Inspect hoses:

Connecting your skimmer to make sure that the connections are tight, there are no kinks, and that all the passageways are open.

D. Maintain water levels:

Ensure that your skimmer doesn't fluctuate from pressure changes and pulls the maximum amount of waste product from the water, maximizing its efficiency.

VII. Trouble shooting:

A. How to adjust the foam rate?

Model # 1802 is a mature device developed by advanced technicians. With well-designed structure, it provides optimum performance. Thus there is no need to adjust the flowing rate.

B. It keeps filling water but not foam.

The skimmer works by creating tiny bubbles in the collection chamber. It functions on circling the salt water and propelling the wastes up to the surface of the chamber and removing from the water column.

Normally there will be bubbles instead of foam if your aquarium is not full of organic wastes. So this is normal situation if the skimmer is just employed in your aquarium for a short time period.

If you have used the skimmer for quite a long time, please keep the upper chamber maintained regularly so that your aquarium can stay clean and your fishes can remain energetic.

C. The water leaks out of the top.

The skimmer comes with a 300GPH pump which is supposed to be of optimum effect when being used together. So it will be better that users do not change the pump to one with much higher or lower flux., or it will be overpowered or leak as a result. If the pump can not work properly, we suggest you replace it to one with 250 - 350GPH flux. Please note that a pump of higher than 350GPH flux. is not recommended for the best effect.

Besides, the skimming system is designed for aquarium with 40 - 80 gal capacity. So if your aquarium is with much lower or higher capacity, please get another one to match your needs, or there will be little effect on your fishes, corals, water plants, etc. Also, leaking will be arising if you install it in a much smaller aquarium.

D. Not work.

Please check if the pump and the skimmer are installed and connected properly. Reassemble them according to the instructions above. Make sure the pump is totally immersed in the water.

And please keep the outlet nozzle as well as the air hose head above water level so that the skimming can be done efficiently. You can also have a check on the power supply to see if the pump works.

E. It produces too many air bubbles.

This item is designed for activating the living environment for the fishes, corals, water plants, etc. so that they can live an energetic, clean and ocean-like lives. Thus adequate bubbles are needed when skimming. By generating millions of air bubbles, protein skimmers also replenish oxygen levels in the entire aquarium. Elevated oxygen levels and proper gas exchange help maintain a stable pH by counteracting the pH-lowering effects of carbon dioxide that can occur at night.

F. Skimmer makes noise.

As a new protein skimmer, 1822 requires a break-in period of about 1-2 weeks before it reaches optimum performance. During this period, you will make adjustments to optimize the air-water mix. and pump placement. The pump should be placed totally inside the water so that it can function properly. In general, there will be low volume at the very beginning as the pump will vibrate a little when it is working. Please check its performance 1 or 2 days later after installation. If it makes lots of noises as if it is shaking violently, there must be problems with the shaft and the casing gasket. A replacement pump will be needed in case there will be damage to the aquarium or the skimmer chamber.